



## WINDOW TEMPLATE INSTRUCTIONS

Please mail templates to:


**Advantec Global Innovations  
43676 Progress Way  
Chilliwack, BC, V2R 0C3  
ATTN: PATTERNS**

**PLEASE NOTE: WE CANNOT ACCEPT PATTERN MATERIAL THICKER THAN 1/8" OR PHYSICAL WINDOWS/DOORS AS TEMPLATES**


We cannot accept physical windows as we need to capture the cutout information.

Please refer to our template quality expectations on the Advantec website, Poor quality templates will be rejected and returned.

1. Provide a window schedule drawing or GA drawings. If neither are available create a Plan View of the boat showing window locations and give each template a number for referencing.
2. Ensure that window opening is clean and free from all sealants, etc. that could distort true shape of opening.
3. Attach paper or cardboard to outside or inside of vessel depending on which side will be easier to get an accurate tracing of opening.
4. Suggested method is to purchase a roll of paper; run it along the side of the boat, hold plywood behind the cutout you are currently tracing for support, lastly cut each cutout tracing in to individual rectangle templates.
5. Trace opening with fine tipped pen making sure to capture a single, visible, straight line. If the reality of the cutout is that it is not a straight cut, please capture the cutout as is and expect an approval drawing noting capability based on the opening.
6. Label template as **R/O** for rough opening (a cutout trace is rough opening), **TOP** and whether it is "**inside view**" or "**outside view**".
7. Label template as **Port** or **Starboard- Forward (W/S)** or **Aft**.
8. On sliding windows indicate sliding panel. "**X**" indicates sliding and "**O**" indicates fixed panel. **Sliding windows must be parallel**. Indicate if T-bar is to be vertical or sloped to match forward or aft angle. (For maximum opening we suggest matching the side in which the direction of your slider is opening).

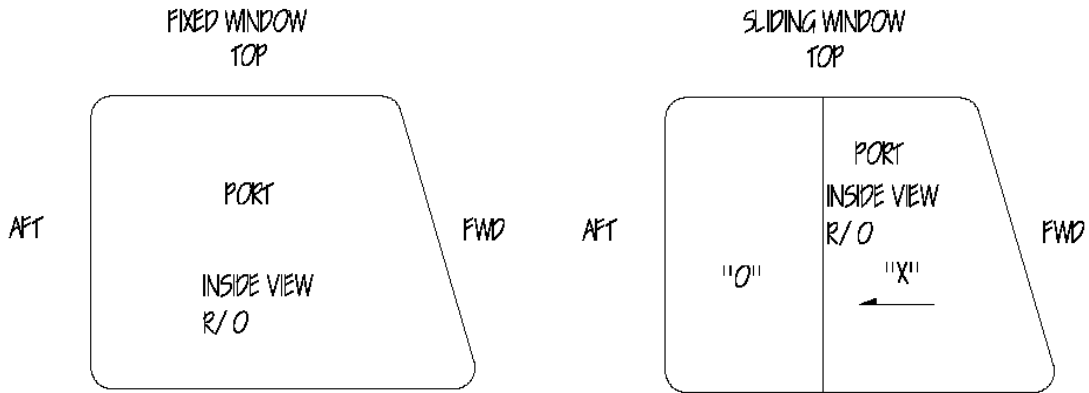

9. For vent windows-indicate where the split should be by measuring the distance from the bottom of the cut-out to the top of the division bar. Label vent with "X".
10. For direct bond glass with frit-indicate where the frit line should be. Label frit line and indicate **OSM** for outside measurements of the glass. Direct Bond glass templates must be very accurate.

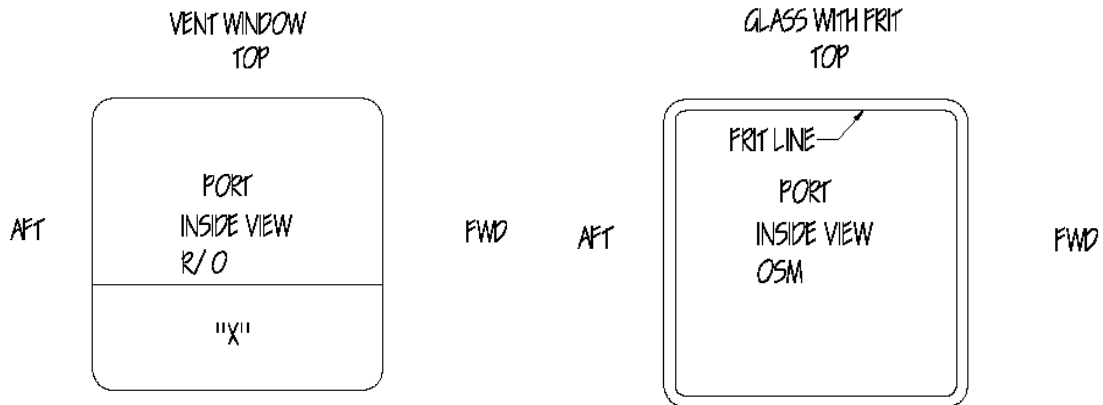

11. Please include **Window Type, Finish Details, Bulkhead Thickness** and any **Glass** information.
12. Roll up paper templates (**do not fold**), mark with any references provided by your sales person for easier tracking. (Multiple folds may change the overall size of the template)
13. You need your templates returned, please clearly indicate this on your templates AND your purchase order. AdvanTec Manufacturing Canada reserves the right to destroy templates left at our facility for more than 6 months.