



**USA
SLIDING
DOORS**


43676 Progress Way, Chilliwack, BC V2R 0C3
604.607.0091 | **Toll Free:** 1.800.770.0455
info@advantecglobal.com | usaslidingdoors.com

Single Electro-Hydraulic Personnel Door

Model Number: USA-1004

Single electro-hydraulic sliding personnel door, watertight to 40' head pressure.

*Custom sizes and pressures available upon request.

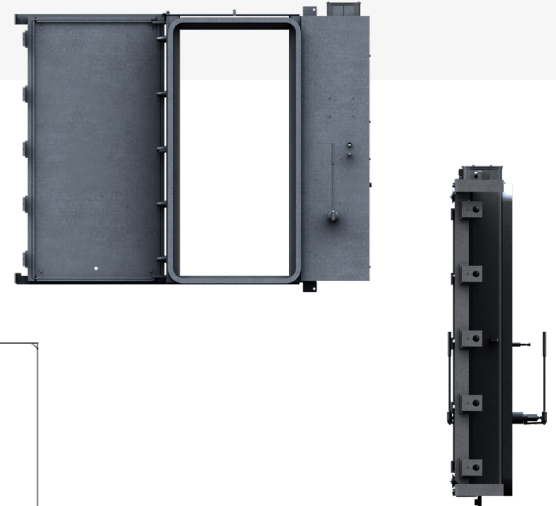


RATING: WT

CLEAR OPENING SIZE:

Tolerance $\pm 1/8$ "

	Min	Max
"A"	31"	47"
"B"	70"	78"



POWER REQUIREMENTS:

- 460VAC, 60Hz, 30A, 3 Phase (AVG: 4 kW)

WEIGHT:

- Approx.: 897 LB.

MINIMUM CLOSING TIME:

- 40 Sec.

FRAME FINISH OPTIONS:

- Bare Metal, Mill Finish
- Primer Paint
- Primer Base Coats
- Topcoat
- Powder Coat

OF DOG PINS:

- 10

DOOR MATERIAL:

- Mild Steel
- Aluminum

FRAME MATERIAL:

- Mild Steel (For Steel Door Only)
- Aluminum (For Aluminum Door Only)

ACTUATION:

- Single Hydraulic Actuator (3000 PSI Test/1000 PSI Operation)

SAFETY FEATURES:

- Hazard Lights
- Hazard Buzzer

GASKET:

- Neoprene

OPERATION:

- Manual (Hand Lever)
- Electrically Powered
- Locally Operated
- Bridge Controlled

CLASS OPTIONS:

(Vessel type and size rule set typically reviewed for Class)

- ABS
- DNV-GL
- LR
- USCG

AVAILABLE DOCUMENTS:

- Wiring Diagrams
- Hydraulic Schematics
- Installation Manual



ISO 9001
**PROUDLY MADE IN
NORTH AMERICA**